



- 500W DC-DC
- HIGH POWER DENSITY: 5.53W/cm³ (0.34W/inch³)
- 90% EFFICIENCY TYPICAL
- ACTIVE LOAD SHARING
- REMOTE ON / OFF
- TRIM VOLTAGE RANGE 80-110%
- LOW STARTUP TEMPERATURE: -40°C
- 2 YEAR WARRANTY



DC-DC SERIES

POWER SUPPLY DESIGN EXCELLENCE

The F501-385 DC-DC full brick produces a complete base plate cooled AC-DC power supply when used with the Powerstax FP series. It embraces established and proven technology, in use in critical process control installations worldwide. It yields a full brick which is designed to operate as an integral part of a complete distributed power system. This efficient design means reduced energy costs, a greater return on your investment, greater reliability and longer product life.

COMPLETE PROTECTION

A comprehensive list of in-built protection functions such as over-voltage protection, under-voltage protection and short-circuit protection are complemented by unique features such as a thermal

monitoring signal to provide early warning of potential system faults.

UNMATCHED FLEXIBILITY

By combining a number of F501-385 bricks in series a significantly higher output voltage can be produced. When up to twenty F501-385 bricks are paralleled a 10kW system can be produced.

APPLICATIONS

Typical applications for the F501-385 include military and commercial wireless systems, radar and communication systems, process control installations, signage, telecom infrastructure and security systems.

MODEL	INPUT VOLTAGE	OUTPUT VOLTAGE	POWER	MAXIMUM CURRENT
F501-385-240	355-400V	24V	500W	20.8A
F501-385-280	355-400V	28V	500W	17.9A
F501-385-480	355-400V	48V	500W	10.4A
F501-385-560	355-400V	56V	500W	8.9A



OUTPUT SPECIFICATIONS	
Output Voltage Adjust (V trim)	80-110%
Load Regulation (0A to full load)	0.3% typical
Line Regulation (over Vin range)	0.02% typical
Ripple (20Hz to 20MHz)	2% Vp-p maximum
Current Limit Trip Point	110% F.L. typical
Transient Response Peak Deviation* (Load change from 25% to 75% F.L.)	5% Vout typical
Transient Response Settling Time* (Vout within 1% Vout nominal)	100µsec typical
External Load Capacitance	0µF minimum 1000µF maximum
Power Sharing Accuracy (10 to 100% Full Load)	±5% F.L.
Remote Sense Compensation	0.5Vdc
Turn ON Delay (Vout within 1% or steady state)	500msec typical at F.L.


ENVIRONMENTAL CHARACTERISTICS	
Input/Output Isolation	3000Vdc maximum
Input/Baseplate Isolation	2500Vdc maximum
Output/Baseplate Isolation	500Vdc maximum
Input to Output Resistance	>10Mohms
Weight	170g
Size	116.8 x 61x 12.7mm 4.6 x 2.4 x 0.5inches
Shock	20g, ½ sine wave
Vibration	Non operating 10-55Hz (sweep for 1min) Amplitude 0.825mm constant (max 5g) X, Y, Z 1 hour each axis

* 0.5A/µsec slew rate

PROTECTION	
Overvoltage	115% maximum
Overcurrent	Constant current until output voltage drops to below 20%. Output enters trip and restart below this level
Overtemperature shutdown (Case temperature)	105°C minimum 110°C maximum
Short-Circuit	Trip and restart, average less than 50% F.L.

Typical Mechanical Drawing:

(Inches) mm

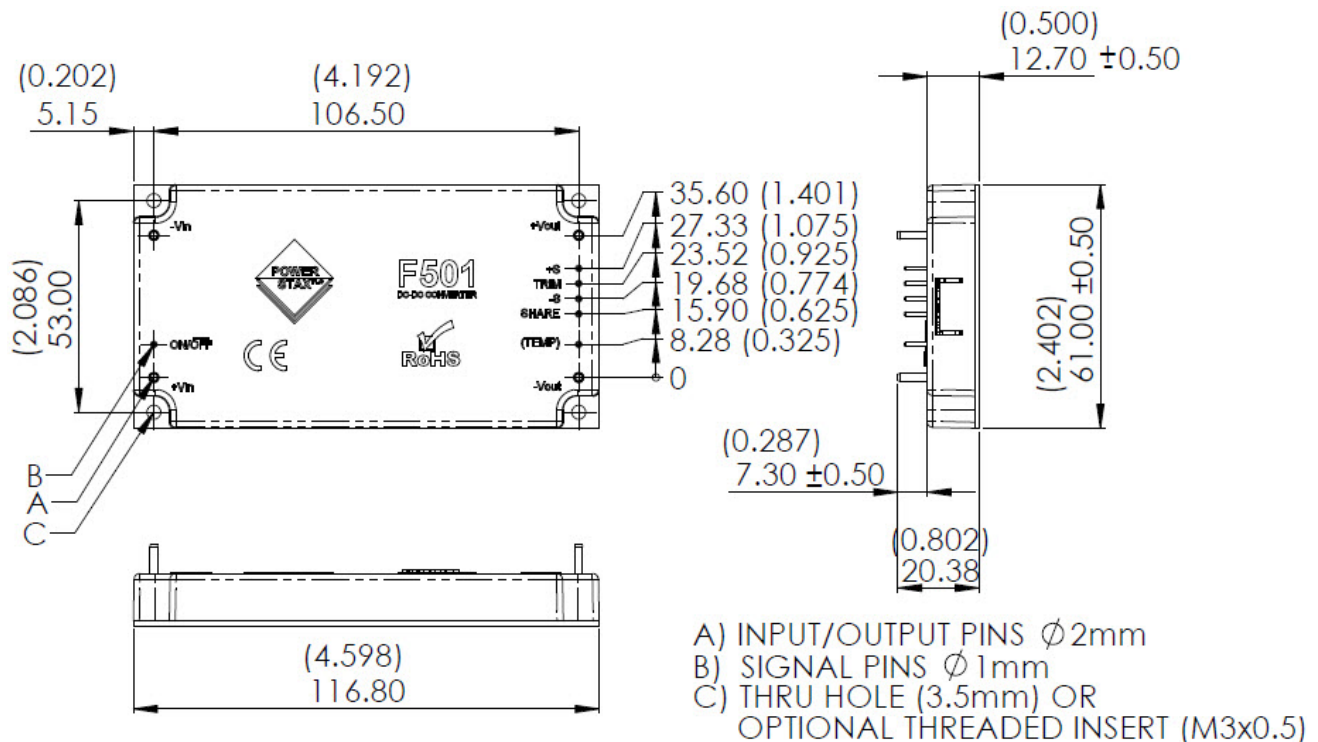

Powerstax Europe

Units 5-6 Heron Avenue
 Wickford
 Essex
 SS11 8DL, UK

Powerstax North America

12804 W. Santa Ynez Drive
 Sun City West
 Arizona 85375
 USA

Information and specifications contained in this data sheet are believed to be correct at the time of publication. However, Powerstax accept no responsibility for consequences arising from printing errors or inaccuracies. Specifications are subject to change without notice.